


20-Lead Ceramic Side-Brazed Package Outline (C/NC)
.980x.280in. body, .200in. height (max), .100in. pitch

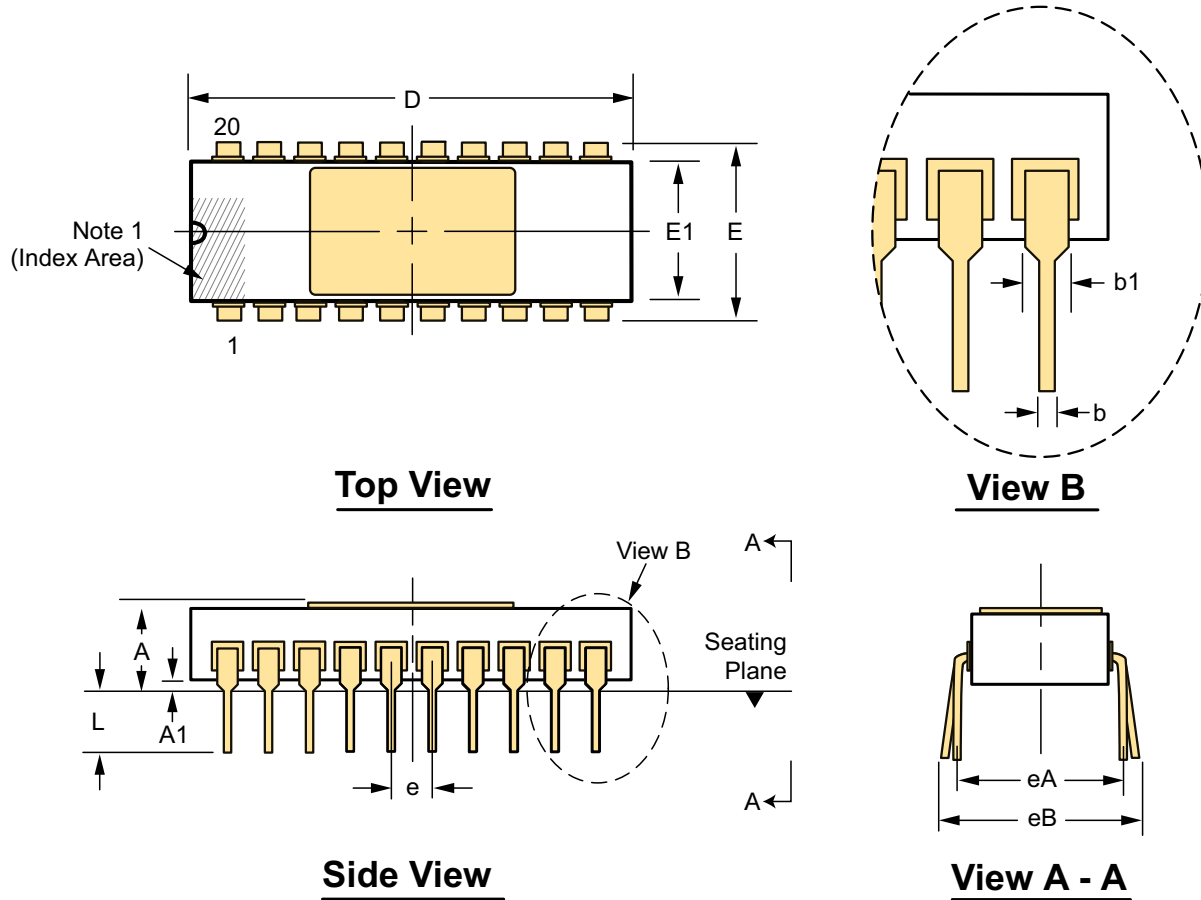

Note:
 1. A Pin 1 identifier must be located in the index area indicated. The Pin 1 identifier can be: a molded mark/identifier; an embedded metal marker; or a printed indicator.

Symbol	A	A1	b	b1	D	E	E1	eA	eB	e	L	
Dimension (inches)	MIN	.085	.025	.015	.980	.300	.280	.300 REF	.300 [†]	.100 BSC	.125	
	NOM	-	-	-	-	-	-		-		-	-
	MAX	.200	.070	.022	1.020	.325	.310		.400		.200	

JEDEC Registration MS-015, Variation AE, Issue A, July, 1990.
[†] This dimension differs from the JEDEC drawing.
Drawings not to scale.
Supertex Doc.#: DSPD-20CDIPCNC, Version D041309.

Supertex inc. does not recommend the use of its products in life support applications, and will not knowingly sell them for use in such applications unless it receives an adequate "product liability indemnification insurance agreement." **Supertex inc.** does not assume responsibility for use of devices described, and limits its liability to the replacement of the devices determined defective due to workmanship. No responsibility is assumed for possible omissions and inaccuracies. Circuitry and specifications are subject to change without notice. For the latest product specifications refer to the **Supertex inc.** (website: <http://www.supertex.com>)